

# LUDVIKSSON EHF - LEDLJÓS








Njarðarbraut 3 í Reykjanesbær - 565 8911 \* 867 8911 \* ludviksson@ludviksson.com

<http://www.ledljós.com>

## Bílaljós - Off Road led light bar

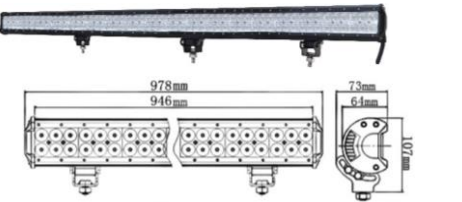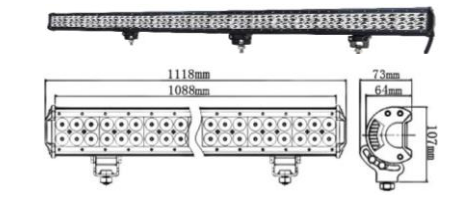

Item No	Myndir	Description	Package	Verð án vsk	Watt
INC-ORL-C2018		<ul style="list-style-type: none"> <li>.LED Power: 18W</li> <li>.Operating Voltage: 9-30V DC</li> <li>.Waterproof rate: IP 67</li> <li>.6pcs*3w high intensity CREE LEDs</li> <li>.Optional Color: Black,White</li> <li>.Color Temperature: 6000K</li> <li>.Material:DieIcINct aluminum housing</li> <li>.Lens material: PC</li> <li>.Mounting Bracket: Alu firm bracket</li> <li>.Beam:8degree Spot/60degree flood/Combo</li> <li>.30000 hours above life time</li> <li>. Dimensions : 4.0 inch</li> </ul>	<ul style="list-style-type: none"> <li>PKG size : 173*115*100 mm</li> <li>QTY : 12 pcs/ctn</li> <li>N.W : 0.75 kg/pcs</li> <li>Ctn Size : 53*35.5*22 cm</li> <li>Gross weight : 10KG</li> <li>MeINcurement Weight: 12 KG</li> </ul>	<b>4.620 kr.</b>	18w
INC-ORL-C2036		<ul style="list-style-type: none"> <li>.LED Power: 36W</li> <li>.Operating Voltage: 9-30V DC</li> <li>.Waterproof rate: IP 67</li> <li>.12pcs*3w high intensity CREE LEDs</li> <li>.Optional Color: Black,White</li> <li>.Color Temperature: 6000K</li> <li>.Material:DieIcINct aluminum housing</li> <li>.Lens material: PC</li> <li>.Mounting Bracket: Alu firm bracket</li> <li>.Beam:8degree Spot/60degree flood/Combo</li> <li>.30000 hours above life time</li> <li>. Dimensions : 7.0 inch</li> </ul>	<ul style="list-style-type: none"> <li>PKG size : 240*115*100 mm</li> <li>QTY : 12 pcs/ctn</li> <li>N.W : 1.0 kg/pcs</li> <li>Ctn Size : 490*240*305 mm</li> <li>Gross weight : 12.5 KG</li> <li>MeINcurement Weight: 13KG</li> </ul>	<b>7.762 kr.</b>	36w
INC-ORL-C2054		<ul style="list-style-type: none"> <li>.LED Power: 54W</li> <li>.Operating Voltage: 9-30V DC</li> <li>.Waterproof rate: IP 67</li> <li>.18pcs*3w high intensity CREE LEDs</li> <li>.Optional Color: Black,White</li> <li>.Color Temperature: 6000K</li> <li>.Material:DieIcINct aluminum housing</li> <li>.Lens material: PC</li> <li>.Mounting Bracket: Alu firm bracket</li> <li>.Beam:8degree Spot/60degree flood/Combo</li> <li>.30000 hours above life time</li> <li>. Dimensions : 9 inch</li> </ul>	<ul style="list-style-type: none"> <li>PKG size : 310*115*100 mm</li> <li>QTY : 12 pcs/ctn</li> <li>N.W : 1.32 kg/pcs</li> <li>Ctn Size : 635*370*235 mm</li> <li>Gross weight : 15.8 KG</li> <li>MeINcurement Weight: 16.5 KG</li> </ul>	<b>7.885 kr.</b>	54w
INC-ORL-C2072		<ul style="list-style-type: none"> <li>.LED Power: 72W</li> <li>.Operating Voltage: 9-30V DC</li> <li>.Waterproof rate: IP 67</li> <li>.24pcs*3w high intensity CREE LEDs</li> <li>.Optional Color: Black,White</li> <li>.Color Temperature: 6000K</li> <li>.Material:DieIcINct aluminum housing</li> <li>.Lens material: PC</li> <li>.Mounting Bracket: Alu firm bracket</li> <li>.Beam:8degree Spot/60degree flood/Combo</li> <li>.30000 hours above life time</li> <li>. Dimensions : 12 inch</li> </ul>	<ul style="list-style-type: none"> <li>PKG size : 380*115*100 mm</li> <li>QTY : 6 pcs/ctn</li> <li>N.W : 1.8 kg/pcs</li> <li>Ctn Size : 385*350*300 mm</li> <li>Gross weight : 11 KG</li> <li>MeINcurement Weight: 13 KG</li> </ul>	<b>10.349 kr.</b>	72w
INC-ORL-C2090		<ul style="list-style-type: none"> <li>.LED Power: 90W</li> <li>.Operating Voltage: 9-30V DC</li> <li>.Waterproof rate: IP 67</li> <li>.30pcs*3w high intensity CREE LEDs</li> <li>.Optional Color: Black,White</li> <li>.Color Temperature: 6000K</li> <li>.Material:DieIcINct aluminum housing</li> <li>.Lens material: PC</li> <li>.Mounting Bracket: Alu firm bracket</li> <li>.Beam:8degree Spot/60degree flood/Combo</li> <li>.30000 hours above life time</li> <li>. Dimensions : 15 inch</li> </ul>	<ul style="list-style-type: none"> <li>PKG size : 460*130*115 mm</li> <li>QTY : 6 pcs/ctn</li> <li>N.W : 1.9 kg/pcs</li> <li>Ctn Size : 600*365*285 mm</li> <li>Gross weight : 12 KG</li> <li>MeINcurement Weight: 14.5KG</li> </ul>	<b>12.813 kr.</b>	90w
INC-ORL-C2108		<ul style="list-style-type: none"> <li>.LED Power: 108W</li> <li>.Operating Voltage: 9-30V DC</li> <li>.Waterproof rate: IP 67</li> <li>.36pcs*3w high intensity CREE LEDs</li> <li>.Optional Color: Black,White</li> <li>.Color Temperature: 6000K</li> <li>.Material:DieIcINct aluminum housing</li> <li>.Lens material:Toughed glINcs</li> <li>.Mounting Bracket: Alu firm bracket</li> <li>.Opitonal Beam: Flood/Spot</li> <li>.30000 hours above life time</li> <li>. Dimensions : 17 inch</li> </ul>	<ul style="list-style-type: none"> <li>PKG size : 515*130*130 mm</li> <li>QTY : 6 pcs/ctn</li> <li>N.W : 2.55 kg/pcs</li> <li>Ctn Size : 530*410*270 mm</li> <li>Gross weight : 16 KG</li> <li>MeINcurement Weight: 18.5KG</li> </ul>	<b>15.770 kr.</b>	108w
INC-ORL-C2126		<ul style="list-style-type: none"> <li>.LED Power: 126W</li> <li>.Operating Voltage: 9-30V DC</li> <li>.Waterproof rate: IP 67</li> <li>.42pcs*3w high intensity CREE LEDs</li> <li>.Optional Color: Black,White</li> <li>.Color Temperature: 6000K</li> <li>.Material:DieIcINct aluminum housing</li> <li>.Lens material: PC</li> <li>.Mounting Bracket: Alu firm bracket</li> <li>.Beam:8degree Spot/60degree flood/Combo</li> <li>.30000 hours above life time</li> <li>. Dimensions : 20 inch</li> </ul>	<ul style="list-style-type: none"> <li>PKG size : 580*115*100 mm</li> <li>QTY : 6 pcs/ctn</li> <li>N.W : 2.85 kg/pcs</li> <li>Ctn Size : 600*250*345 mm</li> <li>Gross weight : 17KG</li> <li>MeINcurement Weight: 20 KG</li> </ul>	<b>17.248 kr.</b>	126w
INC-ORL-C2234		<ul style="list-style-type: none"> <li>.LED Power: 234W</li> <li>.Operating Voltage: 9-70V DC</li> <li>.Waterproof rate: IP 67</li> <li>.78pcs*3w high intensity CREE LEDs</li> <li>.Optional Color: Black,White</li> <li>.Color Temperature: 6000K</li> <li>.Material:DieIcINct aluminum housing</li> <li>.Lens material: PC</li> <li>.Mounting Bracket: Alu firm bracket</li> <li>.Beam:8degree Spot/60degree flood/Combo</li> <li>.30000 hours above life time</li> <li>. Dimensions : 36 inch</li> </ul>	<ul style="list-style-type: none"> <li>PKG size : 995*125*138 mm</li> <li>QTY : 4 pcs/ctn</li> <li>N.W : 5.2 kg/pcs</li> <li>Ctn Size : 1020*270*275 mm</li> <li>Gross weight : 21 KG</li> <li>MeINcurement Weight: 24.5 KG</li> </ul>	<b>29.814 kr.</b>	234

<p>INC-ORL-C2252</p>		<p>.LED Power: 252W          .Operating Voltage: 9-70V DC          .Waterproof rate: IP 67          .84pcs*3w high intensity CREE LEDs          .Optional Color: Black,White          .Color Temperature: 6000K          .Material:DieciNct aluminum housing          .Lens material: PC          .Mounting Bracket: Alu firm bracket          .Beam:8degree Spot/60degree flood/Combo          .30000 hours above life time . Dimensions : 40 inch</p>	<p>PKG size : 1330*120*110 mm          QTY : 4 pcs/ctn          N.W : 5.5 kg/pcs          Ctn Size : 1350*270*250 mm          Gross weight : 22.5 KG          MeINcurement Weight: 26 KG</p>	<p><b>32.032 kr.</b></p>	<p>252w</p>
<p>INC-ORL-C2324</p>		<p>.LED Power: 324W          .Operating Voltage: 9-70V DC          .Waterproof rate: IP 67          .108pcs*3w high intensity CREE LEDs          .Optional Color: Black,White          .Color Temperature: 6000K          .Material:DieciNct aluminum housing          .Lens material: PC          .Mounting Bracket: Alu firm bracket          .Beam:8degree Spot/60degree flood/Combo          .30000 hours above life time . Dimensions : 51 inch</p>	<p>PKG size : 1330*120*110 mm          QTY : 4 pcs/ctn          N.W : 7 kg/pcs          Ctn Size : 1350*270*250 mm          Gross weight : 28.5 KG          MeINcurement Weight: 32.5 KG</p>	<p><b>41.888 kr.</b></p>	<p>324</p>
<p>INC-ORL-B236</p>		<p>.LED Power: 36W          .Operating Voltage: 10-30V DC          .Waterproof rate: IP 67          .12pcs*3w high intensity Epsitar LEDs          .Optional Color: Black,White          .Color Temperature: 6000K          .Material:DieciNct aluminum housing          .Lens material:Tempered glINCS          .Mounting Bracket: Alu firm bracket          .Beam:12degree Spot/60degree flood/Combo          .30000 hours above life time . Dimensions : 7.5 inch</p>	<p>PKG size : 320*145*155 mm          QTY : 6pcs/ctn          N.W : 1.5 kg/pcs          Ctn Size : 480*360*350 mm          Gross weight : 9.5 KG          MeINcurement Weight: 12.1 KG</p>	<p><b>6.406 kr.</b></p>	<p>36w</p>
<p>INC-ORL-B272</p>		<p>.LED Power: 72W          .Operating Voltage: 10-30V DC          .Waterproof rate: IP 67          .24pcs*3w high intensity Epsitar LEDs          .Optional Color: Black,White          .Color Temperature: 6000K          .Material:DieciNct aluminum housing          .Lens material:Tempered glINCS          .Mounting Bracket: Alu firm bracket          .Beam:12degree Spot/60degree flood/Combo          .30000 hours above life time . Dimensions : 13.5 inch</p>	<p>PKG size : 470*145*155 mm          QTY : 6pcs/ctn          N.W : 2.3 kg/pcs          Ctn Size : 510*480*350 mm          Gross weight : 14.5 KG          MeINcurement Weight: 17.2 KG</p>	<p><b>9.363 kr.</b></p>	<p>72w</p>
<p>INC-ORL-B2120</p>		<p>.LED Power: 120W          .Operating Voltage: 10-30V DC          .Waterproof rate: IP 67          .40pcs*3w high intensity Epsitar LEDs          .Optional Color: Black,White          .Color Temperature: 6000K          .Material:DieciNct aluminum housing          .Lens material:Tempered glINCS          .Mounting Bracket: Alu firm bracket          .Beam:12degree Spot/60degree flood/Combo          .30000 hours above life time . Dimensions : 21.5 inch</p>	<p>PKG size : 670*145*155 mm          QTY : 6pcs/ctn          N.W : 3.3 kg/pcs          Ctn Size : 710*480*350 mm          Gross weight : 20.8 KG          MeINcurement Weight: 23.9 KG</p>	<p><b>13.552 kr.</b></p>	<p>120w</p>
<p>INC-ORL-B2180</p>		<p>.LED Power: 180W          .Operating Voltage: 10-30V DC          .Waterproof rate: IP 67          .60pcs*3w high intensity Epsitar LEDs          .Optional Color: Black,White          .Color Temperature: 6000K          .Material:DieciNct aluminum housing          .Lens material:Tempered glINCS          .Mounting Bracket: Alu firm bracket          .Beam:12degree Spot/60degree flood/Combo          .30000 hours above life time          .Dimensions:31.5 inch</p>	<p>PKG size : 950*145*155 mm          QTY : 4pcs/ctn          N.W : 4.7 kg/pcs          Ctn Size : 970*320*350 mm          Gross weight : 20 KG          MeINcurement Weight: 21.8 KG</p>	<p><b>19.712 kr.</b></p>	<p>180w</p>
<p>INC-ORL-B2240</p>		<p>.LED Power: 240W          .Operating Voltage: 10-30V DC          .Waterproof rate: IP 67          .80pcs*3w high intensity Epsitar LEDs          .Optional Color: Black,White          .Color Temperature: 6000K          .Material:DieciNct aluminum housing          .Lens material:Tempered glINCS          .Mounting Bracket: Alu firm bracket          .Beam:12degree Spot/60degree flood/Combo          .30000 hours above life time . Dimensions:41.5 inch</p>	<p>PKG size : 1210*145*155 mm          QTY : 4pcs/ctn          N.W : 6.0 kg/pcs          Ctn Size : 1220*320*350 mm          Gross weight : 25.4 KG          MeINcurement Weight: 29.9 KG</p>	<p><b>24.394 kr.</b></p>	<p>240w</p>