

LUDVIKSSON EHF - LEDLJÓS








Njarðarbraut 3 í Reykjanesbær - 565 8911 * 867 8911 * ludviksson@ludviksson.com

<http://www.ledljós.com>

Bílaljós - Off Road led light bar

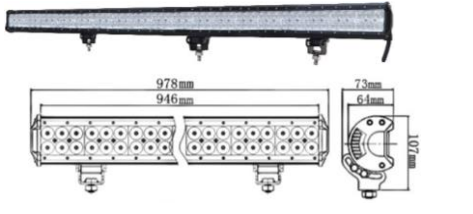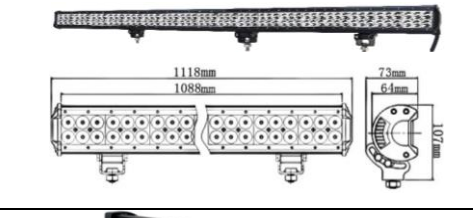

Item No	Myndir	Description	Package	Verð án vsk	Watt
INC-ORL-C2018		<ul style="list-style-type: none"> .LED Power: 18W .Operating Voltage: 9-30V DC .Waterproof rate: IP 67 .6pcs*3w high intensity CREE LEDs .Optional Color: Black,White .Color Temperature: 6000K .Material:DieIcINct aluminum housing .Lens material: PC .Mounting Bracket: Alu firm bracket .Beam:8degree Spot/60degree flood/Combo .30000 hours above life time . Dimensions : 4.0 inch 	<ul style="list-style-type: none"> PKG size : 173*115*100 mm QTY : 12 pcs/ctn N.W : 0.75 kg/pcs Ctn Size : 53*35.5*22 cm Gross weight : 10KG MeINcurement Weight: 12 KG 	4.620 kr.	18w
INC-ORL-C2036		<ul style="list-style-type: none"> .LED Power: 36W .Operating Voltage: 9-30V DC .Waterproof rate: IP 67 .12pcs*3w high intensity CREE LEDs .Optional Color: Black,White .Color Temperature: 6000K .Material:DieIcINct aluminum housing .Lens material: PC .Mounting Bracket: Alu firm bracket .Beam:8degree Spot/60degree flood/Combo .30000 hours above life time . Dimensions : 7.0 inch 	<ul style="list-style-type: none"> PKG size : 240*115*100 mm QTY : 12 pcs/ctn N.W : 1.0 kg/pcs Ctn Size : 490*240*305 mm Gross weight : 12.5 KG MeINcurement Weight: 13KG 	7.762 kr.	36w
INC-ORL-C2054		<ul style="list-style-type: none"> .LED Power: 54W .Operating Voltage: 9-30V DC .Waterproof rate: IP 67 .18pcs*3w high intensity CREE LEDs .Optional Color: Black,White .Color Temperature: 6000K .Material:DieIcINct aluminum housing .Lens material: PC .Mounting Bracket: Alu firm bracket .Beam:8degree Spot/60degree flood/Combo .30000 hours above life time . Dimensions : 9 inch 	<ul style="list-style-type: none"> PKG size : 310*115*100 mm QTY : 12 pcs/ctn N.W : 1.32 kg/pcs Ctn Size : 635*370*235 mm Gross weight : 15.8 KG MeINcurement Weight: 16.5 KG 	7.885 kr.	54w
INC-ORL-C2072		<ul style="list-style-type: none"> .LED Power: 72W .Operating Voltage: 9-30V DC .Waterproof rate: IP 67 .24pcs*3w high intensity CREE LEDs .Optional Color: Black,White .Color Temperature: 6000K .Material:DieIcINct aluminum housing .Lens material: PC .Mounting Bracket: Alu firm bracket .Beam:8degree Spot/60degree flood/Combo .30000 hours above life time . Dimensions : 12 inch 	<ul style="list-style-type: none"> PKG size : 380*115*100 mm QTY : 6 pcs/ctn N.W : 1.8 kg/pcs Ctn Size : 385*350*300 mm Gross weight : 11 KG MeINcurement Weight: 13 KG 	10.349 kr.	72w
INC-ORL-C2090		<ul style="list-style-type: none"> .LED Power: 90W .Operating Voltage: 9-30V DC .Waterproof rate: IP 67 .30pcs*3w high intensity CREE LEDs .Optional Color: Black,White .Color Temperature: 6000K .Material:DieIcINct aluminum housing .Lens material: PC .Mounting Bracket: Alu firm bracket .Beam:8degree Spot/60degree flood/Combo .30000 hours above life time . Dimensions : 15 inch 	<ul style="list-style-type: none"> PKG size : 460*130*115 mm QTY : 6 pcs/ctn N.W : 1.9 kg/pcs Ctn Size : 600*365*285 mm Gross weight : 12 KG MeINcurement Weight: 14.5KG 	12.813 kr.	90w
INC-ORL-C2108		<ul style="list-style-type: none"> .LED Power: 108W .Operating Voltage: 9-30V DC .Waterproof rate: IP 67 .36pcs*3w high intensity CREE LEDs .Optional Color: Black,White .Color Temperature: 6000K .Material:DieIcINct aluminum housing .Lens material:Toughed glINcs .Mounting Bracket: Alu firm bracket .Opitonal Beam: Flood/Spot .30000 hours above life time . Dimensions : 17 inch 	<ul style="list-style-type: none"> PKG size : 515*130*130 mm QTY : 6 pcs/ctn N.W : 2.55 kg/pcs Ctn Size : 530*410*270 mm Gross weight : 16 KG MeINcurement Weight: 18.5KG 	15.770 kr.	108w
INC-ORL-C2126		<ul style="list-style-type: none"> .LED Power: 126W .Operating Voltage: 9-30V DC .Waterproof rate: IP 67 .42pcs*3w high intensity CREE LEDs .Optional Color: Black,White .Color Temperature: 6000K .Material:DieIcINct aluminum housing .Lens material: PC .Mounting Bracket: Alu firm bracket .Beam:8degree Spot/60degree flood/Combo .30000 hours above life time . Dimensions : 20 inch 	<ul style="list-style-type: none"> PKG size : 580*115*100 mm QTY : 6 pcs/ctn N.W : 2.85 kg/pcs Ctn Size : 600*250*345 mm Gross weight : 17KG MeINcurement Weight: 20 KG 	17.248 kr.	126w
INC-ORL-C2234		<ul style="list-style-type: none"> .LED Power: 234W .Operating Voltage: 9-70V DC .Waterproof rate: IP 67 .78pcs*3w high intensity CREE LEDs .Optional Color: Black,White .Color Temperature: 6000K .Material:DieIcINct aluminum housing .Lens material: PC .Mounting Bracket: Alu firm bracket .Beam:8degree Spot/60degree flood/Combo .30000 hours above life time . Dimensions : 36 inch 	<ul style="list-style-type: none"> PKG size : 995*125*138 mm QTY : 4 pcs/ctn N.W : 5.2 kg/pcs Ctn Size : 1020*270*275 mm Gross weight : 21 KG MeINcurement Weight: 24.5 KG 	29.814 kr.	234
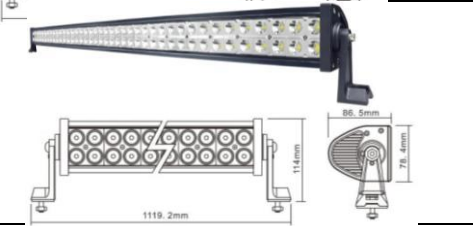
<p>INC-ORL-C2252</p>		<p>.LED Power: 252W .Operating Voltage: 9-70V DC .Waterproof rate: IP 67 .84pcs*3w high intensity CREE LEDs .Optional Color: Black,White .Color Temperature: 6000K .Material:DieciNct aluminum housing .Lens material: PC .Mounting Bracket: Alu firm bracket .Beam:8degree Spot/60degree flood/Combo .30000 hours above life time . Dimensions : 40 inch</p>	<p>PKG size : 1330*120*110 mm QTY : 4 pcs/ctn N.W : 5.5 kg/pcs Ctn Size : 1350*270*250 mm Gross weight : 22.5 KG MeINcurement Weight: 26 KG</p>	<p>32.032 kr.</p>	<p>252w</p>
<p>INC-ORL-C2324</p>		<p>.LED Power: 324W .Operating Voltage: 9-70V DC .Waterproof rate: IP 67 .108pcs*3w high intensity CREE LEDs .Optional Color: Black,White .Color Temperature: 6000K .Material:DieciNct aluminum housing .Lens material: PC .Mounting Bracket: Alu firm bracket .Beam:8degree Spot/60degree flood/Combo .30000 hours above life time . Dimensions : 51 inch</p>	<p>PKG size : 1330*120*110 mm QTY : 4 pcs/ctn N.W : 7 kg/pcs Ctn Size : 1350*270*250 mm Gross weight : 28.5 KG MeINcurement Weight: 32.5 KG</p>	<p>41.888 kr.</p>	<p>324</p>
<p>INC-ORL-B236</p>		<p>.LED Power: 36W .Operating Voltage: 10-30V DC .Waterproof rate: IP 67 .12pcs*3w high intensity Epsitar LEDs .Optional Color: Black,White .Color Temperature: 6000K .Material:DieciNct aluminum housing .Lens material:Tempered glINCS .Mounting Bracket: Alu firm bracket .Beam:12degree Spot/60degree flood/Combo .30000 hours above life time . Dimensions : 7.5 inch</p>	<p>PKG size : 320*145*155 mm QTY : 6pcs/ctn N.W : 1.5 kg/pcs Ctn Size : 480*360*350 mm Gross weight : 9.5 KG MeINcurement Weight: 12.1 KG</p>	<p>6.406 kr.</p>	<p>36w</p>
<p>INC-ORL-B272</p>		<p>.LED Power: 72W .Operating Voltage: 10-30V DC .Waterproof rate: IP 67 .24pcs*3w high intensity Epsitar LEDs .Optional Color: Black,White .Color Temperature: 6000K .Material:DieciNct aluminum housing .Lens material:Tempered glINCS .Mounting Bracket: Alu firm bracket .Beam:12degree Spot/60degree flood/Combo .30000 hours above life time . Dimensions : 13.5 inch</p>	<p>PKG size : 470*145*155 mm QTY : 6pcs/ctn N.W : 2.3 kg/pcs Ctn Size : 510*480*350 mm Gross weight : 14.5 KG MeINcurement Weight: 17.2 KG</p>	<p>9.363 kr.</p>	<p>72w</p>
<p>INC-ORL-B2120</p>		<p>.LED Power: 120W .Operating Voltage: 10-30V DC .Waterproof rate: IP 67 .40pcs*3w high intensity Epsitar LEDs .Optional Color: Black,White .Color Temperature: 6000K .Material:DieciNct aluminum housing .Lens material:Tempered glINCS .Mounting Bracket: Alu firm bracket .Beam:12degree Spot/60degree flood/Combo .30000 hours above life time . Dimensions : 21.5 inch</p>	<p>PKG size : 670*145*155 mm QTY : 6pcs/ctn N.W : 3.3 kg/pcs Ctn Size : 710*480*350 mm Gross weight : 20.8 KG MeINcurement Weight: 23.9 KG</p>	<p>13.552 kr.</p>	<p>120w</p>
<p>INC-ORL-B2180</p>		<p>.LED Power: 180W .Operating Voltage: 10-30V DC .Waterproof rate: IP 67 .60pcs*3w high intensity Epsitar LEDs .Optional Color: Black,White .Color Temperature: 6000K .Material:DieciNct aluminum housing .Lens material:Tempered glINCS .Mounting Bracket: Alu firm bracket .Beam:12degree Spot/60degree flood/Combo .30000 hours above life time .Dimensions:31.5 inch</p>	<p>PKG size : 950*145*155 mm QTY : 4pcs/ctn N.W : 4.7 kg/pcs Ctn Size : 970*320*350 mm Gross weight : 20 KG MeINcurement Weight: 21.8 KG</p>	<p>19.712 kr.</p>	<p>180w</p>
<p>INC-ORL-B2240</p>		<p>.LED Power: 240W .Operating Voltage: 10-30V DC .Waterproof rate: IP 67 .80pcs*3w high intensity Epsitar LEDs .Optional Color: Black,White .Color Temperature: 6000K .Material:DieciNct aluminum housing .Lens material:Tempered glINCS .Mounting Bracket: Alu firm bracket .Beam:12degree Spot/60degree flood/Combo .30000 hours above life time . Dimensions:41.5 inch</p>	<p>PKG size : 1210*145*155 mm QTY : 4pcs/ctn N.W : 6.0 kg/pcs Ctn Size : 1220*320*350 mm Gross weight : 25.4 KG MeINcurement Weight: 29.9 KG</p>	<p>24.394 kr.</p>	<p>240w</p>